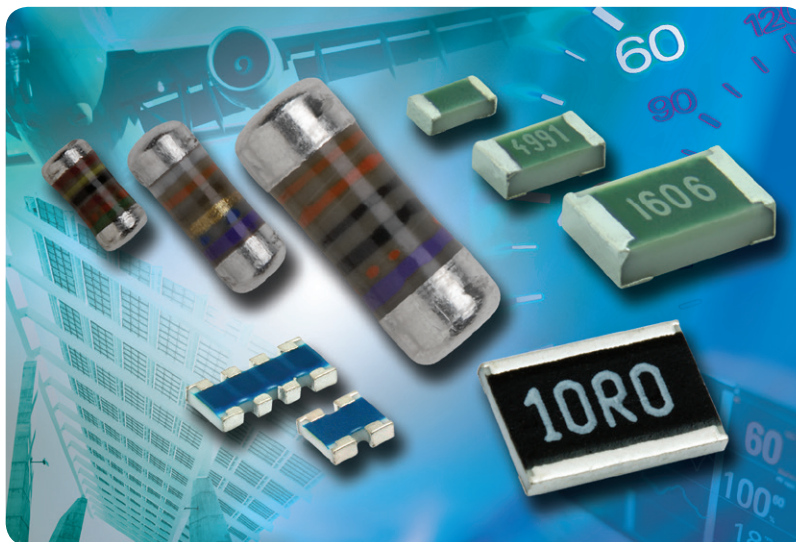




# SMD RESISTORS

Vishay Draloric / Beyschlag

## Vishay Draloric / Beyschlag SMD Resistor Solutions for All Types of Applications



### KEY BENEFITS

- Broadest portfolio
- High-performing products
- Standard, professional, precision, semi-precision, and ultra-precision product range

### FEATURES

- Resistor solutions for application-specific requirements, such as:
  - High pulse load
  - High voltage
  - High power
  - High reliability
  - High frequency
  - Conductive gluing
  - Sulfur resistant
  - Lead-bearing
  - Voltage divider
  - Trimmable
  - Fully green

### RESOURCES

- For technical questions, please contact: [melf@vishay.com](mailto:melf@vishay.com), [thinfilmchip@vishay.com](mailto:thinfilmchip@vishay.com), [thickfilmchip@vishay.com](mailto:thickfilmchip@vishay.com), [thinfilmmarray@vishay.com](mailto:thinfilmmarray@vishay.com), [specialresistors@vishay.com](mailto:specialresistors@vishay.com)
- Please find your relevant sales contacts at: [www.vishay.com/doc?99914](http://www.vishay.com/doc?99914)

A **WORLD OF**  
**SOLUTIONS**



# SMD RESISTORS

Vishay Draloric / Beyschlag

## ACCURACY CLASSIFICATION

	<b>Standard</b> e.g. TCR 100 / 1 %	<b>Semi-Precision</b> e.g. TCR 100 / 0.5 %	<b>Professional</b> e.g. TCR 50 / 1 %	<b>Precision</b> e.g. TCR 25 / 0.1 %	<b>Ultra-Precision</b> e.g. TCR 5 / 0.05 %
<b>Thin Film MELF</b> (pp. 5-6)			MM SMM	MM SMM	UM
<b>Thin Film Chip and Array</b> (pp. 7-9)			MC MC AT MCW AT ACAS	MC MC AT MCW AT ACAS AT TNPW e3	TNPU e3 ACAS ACAS AT
<b>Thick Film Chip and Array</b> (pp. 10-12)	CRCW e3 RCA e3 CRA RCL e3	CRCW-P e3			



# SMD RESISTORS

Vishay Draloric / Beyschlag

## RESISTOR SOLUTIONS FOR SPECIFIC APPLICATION REQUIREMENTS

	High Pulse Load	High Power	High Voltage	Sulfur Resistant	High Reliability	High Frequency
<b>Thin Film MELF</b> (pp. 5-6)	MM SMM	MMA 0204 HT MM SMM	MM HV	MM SMM	MM VG03 SMM0204 EN803 E8 MS1	MM HF SMM0204 HF
<b>Thin Film Chip</b> (pp. 7-9)	MC MC AT MCW AT	MC AT MCW AT NCW AT	TNPV e3	MC MC AT MCW AT NCW AT TNPW e3	MC VG01 TNPS	
<b>Thick Film Chip</b> (pp. 10-12)	CRCW-HP e3 CRCW-IF e3 RCA-IF AT e3	CRCW-HP e3 RCL e3 RCA-LS e3	RCV e3	RCA e3 RCA-LS e3 RCA-IF AT e3	D EN802 E6 CRCW EN802 E6	
<b>Carbon Film MELF</b> (p. 6)	CM	CM	CMB	CM		CMA HF



# SMD RESISTORS

Vishay Draloric / Beyschlag

## RESISTOR SOLUTIONS FOR SPECIFIC APPLICATION REQUIREMENTS






	Conductive Gluing	Lead-Bearing	Voltage Divider	Trimmable	Fully Green	AEC-Q200 Qualified
<b>Thin Film MELF</b> (pp. 5-6)		MS1 ESCC MS1 EN803			MM SMM	MM SMM
<b>Thin Film Chip</b> (pp. 7-9)	MC ATAU ACAS ATAU	TNPW	ACAS ACAS AT			ACAS AT ACAS ATAU MC AT MC ATAU MCW AT NCW AT TNPW e3 TNPU e3 TNPV e3 <sup>(1)</sup>
<b>Thick Film Chip</b> (pp. 10-12)	D AP CRCW-AP	CRCW CRCW-P D EN802 CRCW-TR CRCW-HR		CRCW-TR e3	RCG e3	CRCW e3 CRCW-P e3 RCA e3 RCL e3 CRCW-HP e3 CRCW-IF e3 CRA RCA-IF AT e3
<b>Carbon Film MELF</b> (p. 6)					CM	CM

<sup>(1)</sup> Qualification under preparation.



# SMD RESISTORS

## Vishay Draloric / Beyschlag

Thin Film MELF Resistors			
Series	Description	Features	Brand
<b>MMU, MMA, MMB Professional</b>  	<ul style="list-style-type: none"> <li>• Professional MELF Resistors</li> <li>• Size: 0102 to 0207</li> <li>• Tolerance: <math>\pm 0.5\%</math> to <math>\pm 5\%</math></li> <li>• TCR: <math>\pm 25</math> ppm/K to <math>\pm 100</math> ppm/K</li> <li>• Resistance range: <math>0.22\ \Omega</math> to <math>15\ M\Omega</math>; <math>0\ \Omega</math></li> <li>• Power ratings: <math>0.3\ W</math> to <math>1\ W</math></li> </ul>	<ul style="list-style-type: none"> <li>• Precise and stable thin film technology</li> <li>• High power ratings</li> <li>• IECQ - CECC approval to EN 140401-803</li> <li>• AEC-Q200 qualified</li> </ul>	Beyschlag
<b>MMU, MMA, MMB Precision</b>  	<ul style="list-style-type: none"> <li>• Precision MELF Resistors</li> <li>• Size: 0102 to 0207</li> <li>• Tolerance: <math>\pm 0.1\%</math> to <math>\pm 0.5\%</math></li> <li>• TCR: <math>\pm 15</math> ppm/K to <math>\pm 25</math> ppm/K</li> <li>• Resistance range: <math>10\ \Omega</math> to <math>1\ M\Omega</math></li> <li>• Power ratings: <math>0.2\ W</math> to <math>0.4\ W</math></li> </ul>	<ul style="list-style-type: none"> <li>• Precise and stable thin film technology</li> <li>• IECQ - CECC approval to EN 140401-803</li> <li>• Advanced level of precision and stability</li> <li>• AEC-Q200 qualified</li> </ul>	Beyschlag
<b>SMM 0102, 0204, 0207</b>  	<ul style="list-style-type: none"> <li>• Precision and Professional MELF Resistors</li> <li>• Size: 0102 to 0207</li> <li>• Tolerance: <math>\pm 0.1\%</math> to <math>\pm 5\%</math></li> <li>• TCR: <math>\pm 15</math> ppm/K to <math>\pm 100</math> ppm/K</li> <li>• Resistance range: <math>0.16\ \Omega</math> to <math>10\ M\Omega</math>; (OMM) <math>0\ \Omega</math></li> <li>• Power rating: <math>0.2\ W</math> to <math>1\ W</math></li> </ul>	<ul style="list-style-type: none"> <li>• Precise and stable thin film technology</li> <li>• High power rating</li> <li>• AEC-Q200 qualified</li> </ul>	Draloric
<b>UMA 0204, UMB 0207</b>  	<ul style="list-style-type: none"> <li>• High-Precision MELF Resistors</li> <li>• Size: 0204, 0207</li> <li>• Tolerance: <math>\pm 0.02\%</math> to <math>\pm 0.25\%</math></li> <li>• TCR: <math>\pm 5</math> ppm/K to <math>\pm 15</math> ppm/K</li> <li>• Resistance range: <math>22\ \Omega</math> to <math>390\ k\Omega</math></li> <li>• Power rating: <math>0.25\ W</math> to <math>0.4\ W</math></li> </ul>	<ul style="list-style-type: none"> <li>• Superior overall stability</li> <li>• High-precision thin film technology</li> <li>• IECQ - CECC approval to EN 140401-803</li> </ul>	Beyschlag
<b>SMM 0204 EN803 E0</b>  	<ul style="list-style-type: none"> <li>• MINI-MELF Resistors (CECC approved)</li> <li>• Size: 0204</li> <li>• Tolerance: <math>\pm 0.1\%</math> to <math>\pm 5\%</math></li> <li>• TCR: <math>\pm 15</math> ppm/K to <math>\pm 100</math> ppm/K</li> <li>• Resistance range: <math>1\ \Omega</math> to <math>2.21\ M\Omega</math></li> <li>• Power rating: <math>0.25\ W</math></li> </ul>	<ul style="list-style-type: none"> <li>• High-reliability product</li> <li>• AEC-Q200 qualified</li> <li>• IECQ-CECC approval to EN 140401-803</li> </ul>	Draloric
<b>SMM 0204.... EN803 E8</b>  	<ul style="list-style-type: none"> <li>• MINI-MELF Resistors with Established Reliability</li> <li>• Size: 0204</li> <li>• Tolerance: <math>\pm 0.1\%</math>; <math>\pm 1\%</math></li> <li>• TCR: <math>\pm 15</math> ppm/K; <math>\pm 50</math> ppm/K</li> <li>• Resistance range: <math>1\ \Omega</math> to <math>2.21\ M\Omega</math></li> <li>• Power rating: <math>0.25\ W</math></li> </ul>	<ul style="list-style-type: none"> <li>• Approved to EN 140401-803, version E: Established reliability, failure rate level E8</li> <li>• Stable metal film on high-quality ceramic</li> </ul>	Draloric
<b>MS1....EN803 E8</b>  	<ul style="list-style-type: none"> <li>• Lead (Pb)- Bearing MINI-MELF Resistors with Established Reliability</li> <li>• Size: 0204</li> <li>• Tolerance: <math>\pm 0.1\%</math>; <math>\pm 1\%</math></li> <li>• TCR: <math>\pm 15</math> ppm/K; <math>\pm 50</math> ppm/K</li> <li>• Resistance range: <math>1\ \Omega</math> to <math>2.21\ M\Omega</math></li> <li>• Power rating: <math>0.25\ W</math></li> </ul>	<ul style="list-style-type: none"> <li>• Approved to EN 140401-803, version E: Established reliability, failure rate level E8</li> <li>• Stable metal film on high-quality ceramic</li> <li>• SnPb termination plating, Pb contents <math>&gt; 6\%</math></li> <li>• Meets Bellcore, MIL, and ESCC plating requirements</li> </ul>	Draloric



# SMD RESISTORS

## Vishay Draloric / Beyschlag

Thin Film MELF Resistors			
Series	Description	Features	Brand
<b><a href="#">MS1...ESCC</a></b>  	<ul style="list-style-type: none"> <li>• <b>Hi-Rel Thin Film MINI-MELF Resistors</b></li> <li>• Size: 0204</li> <li>• Tolerance: <math>\pm 0.1\%</math> to <math>\pm 1\%</math></li> <li>• TCR: <math>\pm 15</math> ppm/K to <math>\pm 50</math> ppm/K</li> <li>• Resistance range: 2.21 <math>\Omega</math> to 5.11 M<math>\Omega</math></li> <li>• Power rating: 0.25 W</li> </ul>	<ul style="list-style-type: none"> <li>• High-reliability product</li> <li>• ESA approved to ESCC 4001/022</li> <li>• Advanced thin film technology</li> <li>• SnPb termination plating, minimum 6 % Pb</li> </ul>	Draloric
<b><a href="#">MMU 0102 HF</a></b> , <b><a href="#">MMA 0204 HF</a></b> , <b><a href="#">MMB 0207 HF</a></b> 	<ul style="list-style-type: none"> <li>• <b>High-Frequency MELF Resistors</b></li> <li>• Size: 0102 to 0207</li> <li>• Tolerance: <math>\pm 1\%</math> to <math>\pm 2\%</math></li> <li>• TCR: <math>\pm 50</math> ppm/K</li> <li>• Resistance range: 1.5 <math>\Omega</math> to 475 <math>\Omega</math></li> <li>• Power ratings: 0.3 W to 1.0 W</li> </ul>	<ul style="list-style-type: none"> <li>• Speciality product for RF applications</li> <li>• Low-inductance non-helical trimmed product</li> </ul>	Beyschlag
<b><a href="#">MMU 0102 VG03</a></b> , <b><a href="#">MMA 0204 VG03</a></b> , <b><a href="#">MMB 0207 VG03</a></b>  	<ul style="list-style-type: none"> <li>• <b>Precision and Professional MELF Resistors with Established Reliability</b></li> <li>• Size: 0102 to 0207</li> <li>• Tolerance: <math>\pm 0.1\%</math> to <math>\pm 1\%</math></li> <li>• TCR: <math>\pm 15</math> ppm/K to <math>\pm 50</math> ppm/K</li> <li>• Resistance range: 1 <math>\Omega</math> to 10 M<math>\Omega</math>; 0 <math>\Omega</math></li> <li>• Power ratings: 0.2 W to 0.4 W</li> </ul>	<ul style="list-style-type: none"> <li>• Established reliability, failure rate level E6 (corresponds to MIL level P)</li> <li>• Precise and stable thin film technology</li> <li>• IECQ - CECC approval to EN 140401-803</li> </ul>	Beyschlag
<b><a href="#">MMA 0204 HT</a></b>  	<ul style="list-style-type: none"> <li>• <b>Professional High-Temperature MINI-MELF Resistor</b></li> <li>• Size: 0204</li> <li>• Tolerance: <math>\pm 0.5\%</math> to <math>\pm 1\%</math></li> <li>• TCR: <math>\pm 25</math> ppm/K to <math>\pm 50</math> ppm/K</li> <li>• Resistance range: 47 <math>\Omega</math> to 100 k<math>\Omega</math>; 0 <math>\Omega</math></li> <li>• Power rating: 0.5 W</li> </ul>	<ul style="list-style-type: none"> <li>• 175 <math>^{\circ}\text{C}</math> specified operating temperature</li> <li>• AEC-Q200 qualified</li> <li>• Excellent stability, <math>&lt; 0.1\%</math></li> </ul>	Beyschlag
<b><a href="#">MMA 0204 HV</a></b> <b><a href="#">MMB 0207 HV</a></b> 	<ul style="list-style-type: none"> <li>• <b>Professional High-Voltage Thin Film MELF Resistors</b></li> <li>• Size: 0204 and 0207</li> <li>• Tolerance: <math>\pm 1\%</math></li> <li>• TCR: <math>\pm 50</math> ppm/K</li> <li>• Resistance range: 340 k<math>\Omega</math> to 10 M<math>\Omega</math></li> <li>• Power rating: 0.4 W to 1.0 W</li> </ul>	<ul style="list-style-type: none"> <li>• High operating voltage, <math>U_{\text{max.}} = 1000</math> V</li> <li>• Advanced metal film technology</li> <li>• Matte Sn termination on Ni barrier layer</li> </ul>	Beyschlag
Carbon Film MELF Resistors			
Series	Description	Features	Brand
<b><a href="#">CMA 0204</a></b> , <b><a href="#">CMB 0207</a></b>   	<ul style="list-style-type: none"> <li>• <b>High Pulse Load MELF Resistors</b></li> <li>• Size: 0204 and 0207</li> <li>• Tolerance: <math>\pm 1\%</math> to <math>\pm 5\%</math></li> <li>• TCR: see datasheet</li> <li>• Resistance range: 2.2 <math>\Omega</math> to 1.5 M<math>\Omega</math></li> <li>• Power rating: 0.4 W to 1 W</li> <li>• Up to 10 kV or 17 kW single pulse capability</li> </ul>	<ul style="list-style-type: none"> <li>• Special carbon film technology</li> <li>• Outstanding pulse load stability</li> <li>• High power ratings</li> <li>• AEC-Q200 qualified</li> <li>• CMB: VDE approval to IEC 60065, 14.2.a (= VDE 0860, 14.1.a)</li> </ul>	Beyschlag
<b><a href="#">CMA 0204 HF</a></b> 	<ul style="list-style-type: none"> <li>• <b>Pulse Load MELF Resistors for High-Frequency Applications</b></li> <li>• Size: 0204</li> <li>• Tolerance: <math>\pm 2\%</math></li> <li>• TCR: -250 ppm/K</li> <li>• Resistance range: 47 <math>\Omega</math> to 300 <math>\Omega</math></li> <li>• Power rating: 0.4 W</li> </ul>	<ul style="list-style-type: none"> <li>• Specialty product for RF applications</li> <li>• ESD capability: 3 kV, human body model</li> <li>• Suitable for more than 10 GHz</li> </ul>	Beyschlag



# SMD RESISTORS

## Vishay Draloric / Beyschlag

Thin Film Chip Resistors			
Series	Description	Features	Brand
<b>TNPW e3</b>  	<ul style="list-style-type: none"> <li>• <b>High-Stability Precision Thin Film Chip Resistors</b></li> <li>• Size: 0402 to 1210</li> <li>• Tolerance: <math>\pm 0.1\%</math> to <math>\pm 1\%</math></li> <li>• TCR: <math>\pm 10</math> ppm/K to <math>\pm 50</math> ppm/K</li> <li>• Resistance range: <math>4.7\ \Omega</math> to <math>3.01\ \text{M}\Omega</math></li> <li>• Power ratings: <math>0.063\ \text{W}</math> to <math>0.33\ \text{W}</math></li> </ul>	<ul style="list-style-type: none"> <li>• Low temperature coefficient and tight tolerances</li> <li>• Superior moisture resistivity</li> <li>• Excellent overall stability at different environmental conditions</li> <li>• AEC-Q200 qualified (sizes 0402 to 1206)</li> </ul>	Vishay
<b>TNPW</b> 	<ul style="list-style-type: none"> <li>• <b>High-Stability Precision Thin Film Chip Resistors</b></li> <li>• Size: 0402 to 1210</li> <li>• Tolerance: <math>\pm 0.1\%</math> to <math>\pm 1\%</math></li> <li>• TCR: <math>\pm 10</math> ppm/K to <math>\pm 50</math> ppm/K</li> <li>• Resistance range: <math>10\ \Omega</math> to <math>3.01\ \text{M}\Omega</math></li> <li>• Power ratings: <math>0.063\ \text{W}</math> to <math>0.33\ \text{W}</math></li> </ul>	<ul style="list-style-type: none"> <li>• SnPb termination plating, minimum 6 % Pb</li> <li>• Excellent overall stability at different environmental conditions</li> <li>• Low temperature coefficient and tight tolerances</li> </ul>	Vishay
<b>TNPU e3</b>  	<ul style="list-style-type: none"> <li>• <b>High-Precision Thin Film Chip Resistors</b></li> <li>• Size: 0603 to 1206</li> <li>• Tolerance: <math>\pm 0.02\%</math> to <math>\pm 0.1\%</math></li> <li>• TCR: <math>\pm 2</math> ppm/K to <math>\pm 10</math> ppm/K</li> <li>• Resistance range: <math>100\ \Omega</math> to <math>511\ \text{k}\Omega</math></li> <li>• Power ratings: <math>0.1\ \text{W}</math> to <math>0.25\ \text{W}</math></li> </ul>	<ul style="list-style-type: none"> <li>• Low temperature coefficient and tight tolerances</li> <li>• Superior moisture resistivity</li> <li>• AEC-Q200 qualified</li> </ul>	Draloric
<b>TNPV e3</b> 	<ul style="list-style-type: none"> <li>• <b>High-Voltage Thin Film Flat Chip Resistors</b></li> <li>• Size: 1206 and 1210</li> <li>• Tolerance: <math>\pm 0.1\%</math> to <math>\pm 1\%</math></li> <li>• TCR: <math>\pm 10</math> ppm/K to <math>\pm 50</math> ppm/K</li> <li>• Resistance range: <math>121\ \text{k}\Omega</math> to <math>3.01\ \text{M}\Omega</math></li> <li>• Power rating: <math>0.25\ \text{W}</math> to <math>0.33\ \text{W}</math></li> </ul>	<ul style="list-style-type: none"> <li>• High operating voltage <math>U_{\text{max}}</math> up to <math>1000\ \text{V}</math></li> <li>• Precision properties: TCR and tolerances down to <math>\pm 10</math> ppm/K; <math>\pm 0.1\%</math></li> <li>• Excellent overall stability at different environmental conditions</li> <li>• Superior moisture resistivity</li> </ul>	Draloric
<b>MC Professional</b>  	<ul style="list-style-type: none"> <li>• <b>Professional Thin Film Chip Resistors</b></li> <li>• Size: 0402 to 1206</li> <li>• Tolerance: <math>\pm 0.5\%</math> to <math>\pm 1\%</math></li> <li>• TCR: <math>\pm 25</math> ppm/K to <math>\pm 50</math> ppm/K</li> <li>• Resistance range: <math>1\ \Omega</math> to <math>10\ \text{M}\Omega</math>; <math>0\ \Omega</math></li> <li>• Power ratings: <math>0.1\ \text{W}</math> to <math>0.4\ \text{W}</math></li> </ul>	<ul style="list-style-type: none"> <li>• Excellent overall stability: Class 0.5</li> <li>• IECQ - CECC approval to EN 140401-801</li> </ul>	Beyschlag
<b>MC Precision</b>  	<ul style="list-style-type: none"> <li>• <b>Precision Thin Film Chip Resistors</b></li> <li>• Size: 0402 to 1206</li> <li>• Tolerance: <math>\pm 0.1\%</math> to <math>\pm 0.25\%</math></li> <li>• TCR: <math>\pm 10</math> ppm/K to <math>\pm 25</math> ppm/K</li> <li>• Resistance range: <math>39\ \Omega</math> to <math>2\ \text{M}\Omega</math></li> <li>• Power ratings: <math>0.063\ \text{W}</math> to <math>0.25\ \text{W}</math></li> </ul>	<ul style="list-style-type: none"> <li>• Superior overall stability: Class 0.1 and 0.25</li> <li>• IECQ - CECC approval to EN 140401-801</li> </ul>	Beyschlag
<b>MC AT Professional</b>  	<ul style="list-style-type: none"> <li>• <b>Professional Automotive Grade Thin Film Chip Resistors</b></li> <li>• Size: 0402 to 1206</li> <li>• Tolerance: <math>\pm 0.5\%</math> to <math>\pm 1\%</math></li> <li>• TCR: <math>\pm 25</math> ppm/K to <math>\pm 50</math> ppm/K</li> <li>• Resistance range: <math>1\ \Omega</math> to <math>1\ \text{M}\Omega</math>; <math>0\ \Omega</math></li> <li>• Power ratings: <math>0.1\ \text{W}</math> to <math>0.4\ \text{W}</math></li> </ul>	<ul style="list-style-type: none"> <li>• High-temperature operation up to <math>175\ ^\circ\text{C}</math></li> <li>• IECQ - CECC approval to EN 140401-801</li> <li>• AEC-Q200 qualified</li> <li>• Superior moisture resistivity</li> </ul>	Beyschlag
<b>MC AT Precision</b>  	<ul style="list-style-type: none"> <li>• <b>Precision Automotive Grade Thin Film Chip Resistors</b></li> <li>• Size: 0402 to 1206</li> <li>• Tolerance: <math>\pm 0.1\%</math></li> <li>• TCR: <math>\pm 10</math> ppm/K to <math>\pm 25</math> ppm/K</li> <li>• Resistance range: <math>47\ \Omega</math> to <math>1\ \text{M}\Omega</math></li> <li>• Power ratings: <math>0.1\ \text{W}</math> to <math>0.4\ \text{W}</math></li> </ul>	<ul style="list-style-type: none"> <li>• Advanced level of precision and stability</li> <li>• IECQ - CECC approval to EN 140401-801</li> <li>• AEC-Q200 qualified</li> <li>• Superior moisture resistivity</li> </ul>	Beyschlag





# SMD RESISTORS

## Vishay Draloric / Beyschlag



Thin Film Chip Resistors			
Series	Description	Features	Brand
<b>MC ATAU Precision</b> 	<ul style="list-style-type: none"> <li>• <b>Precision Gold-Terminated Thin Film Chip Resistors for Conductive Gluing</b></li> <li>• Size: 0402 and 0603</li> <li>• Tolerance: <math>\pm 0.1\%</math></li> <li>• TCR: <math>\pm 15</math> ppm/K and <math>\pm 25</math> ppm/K</li> <li>• Resistance range: 100 <math>\Omega</math> to 100 k<math>\Omega</math></li> <li>• Power rating: 0.1 W to 0.125 W</li> </ul>	<ul style="list-style-type: none"> <li>• Gold terminations for conductive gluing</li> <li>• Superior temperature cycling robustness</li> <li>• Superior moisture resistivity</li> <li>• AEC-Q200 qualified</li> </ul>	Beyschlag
<b>MCW 0406 AT Professional</b> 	<ul style="list-style-type: none"> <li>• <b>Professional Wide Terminal Thin Film Chip Resistor</b></li> <li>• Size: 0406</li> <li>• Tolerance: <math>\pm 0.5\%</math> to <math>\pm 1\%</math></li> <li>• TCR: <math>\pm 25</math> ppm/K to <math>\pm 50</math> ppm/K</li> <li>• Resistance range: 1 <math>\Omega</math> to 100 k<math>\Omega</math></li> <li>• Power rating: 0.3 W</li> </ul>	<ul style="list-style-type: none"> <li>• Rated dissipation <math>P_{85}</math> up to 300 mW</li> <li>• Superior temperature cycling robustness</li> <li>• AEC-Q200 qualified</li> <li>• High-temperature operation up to 175 <math>^{\circ}\text{C}</math></li> </ul>	Beyschlag
<b>MCW 0406 AT Precision</b> 	<ul style="list-style-type: none"> <li>• <b>Precision Wide Terminal Thin Film Chip Resistor</b></li> <li>• Size: 0406</li> <li>• Tolerance: <math>\pm 0.1\%</math></li> <li>• TCR: <math>\pm 15</math> ppm/K to <math>\pm 25</math> ppm/K</li> <li>• Resistance range: 1 <math>\Omega</math> to 100 k<math>\Omega</math></li> <li>• Power rating: 0.25 W</li> </ul>	<ul style="list-style-type: none"> <li>• Advanced level of precision and stability</li> <li>• Precision (TCR <math>\pm 15</math> ppm/K; <math>\pm 0.1\%</math> tolerance) down to 1 <math>\Omega</math></li> <li>• Superior temperature cycling robustness</li> <li>• AEC-Q200 qualified</li> </ul>	Beyschlag
<b>NCW 0406 AT</b> 	<ul style="list-style-type: none"> <li>• <b>Low-Ohmic Wide Terminal Thin Film Chip Resistors</b></li> <li>• Size: 0406</li> <li>• Tolerance: <math>\pm 1\%</math></li> <li>• TCR: <math>\pm 50</math> ppm/K</li> <li>• Resistance range: 0.33 <math>\Omega</math> to 0.91 <math>\Omega</math></li> <li>• Power rating: 0.3 W</li> </ul>	<ul style="list-style-type: none"> <li>• Rated power dissipation <math>P_{85} = 300</math> mW</li> <li>• Resistance range down to 0.33 <math>\Omega</math></li> <li>• Superior temperature cycling robustness</li> <li>• Superior moisture resistivity</li> <li>• AEC-Q200 qualified</li> </ul>	Beyschlag
<b>MC VG01</b> 	<ul style="list-style-type: none"> <li>• <b>Thin Film Chip Resistors with Established Reliability</b></li> <li>• Size: 0402 to 1206</li> <li>• Tolerance: <math>\pm 0.1\%</math>; <math>\pm 1\%</math></li> <li>• TCR: <math>\pm 15</math> ppm/K; <math>\pm 50</math> ppm/K</li> <li>• Resistance range: 1 <math>\Omega</math> to 1 M<math>\Omega</math>; 0 <math>\Omega</math></li> <li>• Power ratings: 0.063 W to 0.25 W</li> </ul>	<ul style="list-style-type: none"> <li>• Established reliability, failure rate level 6 (corresponds to MIL level P)</li> <li>• Advanced level of precision and stability</li> <li>• IECQ - CECC Approval to EN 140401-801</li> </ul>	Beyschlag
<b>TNPS...ESCC</b> 	<ul style="list-style-type: none"> <li>• <b>Hi-Rel Thin Film Chip Resistors</b></li> <li>• Size: 0603 to 1206</li> <li>• Tolerance: <math>\pm 0.1\%</math> to <math>\pm 1\%</math></li> <li>• TCR: <math>\pm 15</math> ppm/K to <math>\pm 50</math> ppm/K</li> <li>• Resistance range: 10 <math>\Omega</math> to 1 M<math>\Omega</math></li> <li>• Power ratings: 0.1 W to 0.25 W</li> </ul>	<ul style="list-style-type: none"> <li>• ESA approval to ESCC 4001/029</li> <li>• Advanced level of precision and stability</li> <li>• SnPb termination plating, minimum 6 % Pb</li> </ul>	Draloric
<b>ACAS 0612 Professional</b> 	<ul style="list-style-type: none"> <li>• <b>Professional Thin Film Chip Resistor Array</b></li> <li>• Size: 0612</li> <li>• Tolerance: <math>\pm 0.5\%</math>; <math>\pm 1\%</math></li> <li>• TCR: <math>\pm 25</math> ppm/K to <math>\pm 50</math> ppm/K</li> <li>• Resistance range: 47 <math>\Omega</math> to 221 k<math>\Omega</math></li> <li>• Power rating per element: 0.1 W</li> </ul>	<ul style="list-style-type: none"> <li>• Four insulated resistors on one substrate</li> <li>• Two pairs or four equal resistor values</li> <li>• Resistance ratio up to 10:1</li> <li>• Professional applications with space constraints</li> </ul>	Beyschlag
<b>ACAS 0612 Precision</b> 	<ul style="list-style-type: none"> <li>• <b>Precision Thin Film Chip Resistor Array</b></li> <li>• Size: 0612</li> <li>• Relative tolerance: down to <math>\pm 0.05\%</math></li> <li>• Relative TCR: down to <math>\pm 5</math> ppm/K</li> <li>• Resistance range: 47 <math>\Omega</math> to 221 k<math>\Omega</math></li> <li>• Power rating per element: 0.1 W</li> </ul>	<ul style="list-style-type: none"> <li>• Four insulated resistors on one substrate</li> <li>• Tight TCR tracking and tolerance matching</li> <li>• Resistance ratio up to 5:1</li> <li>• For all applications with matched resistors like voltage dividers or feedback circuits</li> </ul>	Beyschlag





# SMD RESISTORS

Vishay Draloric / Beyschlag

Thin Film Chip Resistors			
Series	Description	Features	Brand
<p><a href="#">ACAS 0606 AT</a>, <a href="#">ACAS 0612 AT</a></p>  <p><small>AUTOMOTIVE GRADE</small></p>	<ul style="list-style-type: none"> <li>• Precision Automotive Grade Thin Film Chip Resistor Array</li> <li>• Size: 0606 and 0612</li> <li>• Relative tolerance: down to <math>\pm 0.05\%</math></li> <li>• Relative TCR: down to <math>\pm 5</math> ppm/K</li> <li>• Resistance Range: 47 <math>\Omega</math> to 150 k<math>\Omega</math></li> <li>• Power rating per element: 0.125 W</li> </ul>	<ul style="list-style-type: none"> <li>• Superior moisture resistivity</li> <li>• Two or four insulated resistors on one substrate</li> <li>• Tight TCR tracking and tolerance matching</li> <li>• Resistance ratio up to 20:1</li> <li>• AEC-Q200 qualified</li> <li>• Perfect for automotive and industrial applications with matched resistors like voltage dividers or feedback circuits</li> </ul>	Beyschlag
<p><a href="#">ACAS 0606 ATAU Precision</a></p>  <p><small>AUTOMOTIVE GRADE</small></p>	<ul style="list-style-type: none"> <li>• Precision Gold-Terminated Thin Film Chip Resistor Array for Conductive Gluing</li> <li>• Size: 0606</li> <li>• Relative tolerance: down to <math>\pm 0.05\%</math></li> <li>• Relative TCR: down to <math>\pm 5</math> ppm/K</li> <li>• Resistance range: 100 <math>\Omega</math> to 150 k<math>\Omega</math></li> <li>• Power rating per element: 0.125 W</li> </ul>	<ul style="list-style-type: none"> <li>• Gold terminations for conductive gluing</li> <li>• Two insulated resistors on one substrate</li> <li>• Tight TCR tracking and tolerance matching</li> <li>• Resistance ratio up to 20:1</li> <li>• Superior moisture resistivity</li> <li>• AEC-Q200 qualified</li> </ul>	Beyschlag



# SMD RESISTORS

## Vishay Draloric / Beyschlag

Thick Film Chip Resistors			
Series	Description	Features	Brand
<a href="#">D/CRCW e3</a> 	<ul style="list-style-type: none"> <li>• <b>Standard Thick Film Chip Resistors</b></li> <li>• Size: 0402 to 2512</li> <li>• Resistance range: 1 <math>\Omega</math> to 10 M<math>\Omega</math></li> <li>• Power ratings: 0.063 W to 1 W</li> <li>• Zero ohm jumper: available for all sizes</li> </ul>	<ul style="list-style-type: none"> <li>• AEC-Q200 qualified</li> <li>• Metal glaze on high-quality ceramic</li> </ul>	Vishay
<a href="#">D/CRCW</a> 	<ul style="list-style-type: none"> <li>• <b>Lead (Pb)-Bearing Thick Film Chip Resistors</b></li> <li>• Size: 0402 to 2512</li> <li>• Resistance range: 1 <math>\Omega</math> to 10 M<math>\Omega</math></li> <li>• Power ratings: 0.063 W to 1 W</li> <li>• Zero ohm jumper: available for all sizes</li> </ul>	<ul style="list-style-type: none"> <li>• SnPb termination plating on Ni barrier, minimum 10% Pb</li> <li>• AEC-Q200 qualified</li> <li>• Metal glaze on high-quality ceramic</li> </ul>	Vishay
<a href="#">RCA e3</a> 	<ul style="list-style-type: none"> <li>• <b>Automotive Grade, Sulfur-Resistant, Lead (Pb)-Free, Thick Film Chip Resistors</b></li> <li>• Size: 0402 to 2512</li> <li>• Resistance range: 1 <math>\Omega</math> to 10 M<math>\Omega</math></li> <li>• Power ratings: 0.063 W to 1 W</li> <li>• Zero ohm jumper: available for all sizes</li> </ul>	<ul style="list-style-type: none"> <li>• Superior resistance against H<sub>2</sub>S-atmosphere</li> <li>• AEC-Q200 qualified</li> <li>• Metal glaze on high-quality ceramic</li> </ul>	Draloric
<a href="#">RCA</a> 	<ul style="list-style-type: none"> <li>• <b>Lead (Pb)-Bearing Automotive Grade, Sulfur-Resistant, Thick Film Chip Resistors</b></li> <li>• Size: 0402 to 2512</li> <li>• Resistance range: 1 <math>\Omega</math> to 10 M<math>\Omega</math></li> <li>• Power ratings: 0.063 W to 1 W</li> <li>• Zero ohm jumper: available for all sizes</li> </ul>	<ul style="list-style-type: none"> <li>• Superior resistance against H<sub>2</sub>S-atmosphere</li> <li>• SnPb termination plating on Ni barrier, minimum 10% Pb</li> <li>• AEC-Q200 qualified</li> </ul>	Vishay
<a href="#">D/CRCW-P e3</a> 	<ul style="list-style-type: none"> <li>• <b>Thick Film Semi-Precision Chip Resistor</b></li> <li>• Size: 0402 to 2512</li> <li>• Resistance range: 1 <math>\Omega</math> to 10 M<math>\Omega</math></li> <li>• Power ratings: 0.063 W to 1 W</li> </ul>	<ul style="list-style-type: none"> <li>• AEC-Q200 qualified</li> <li>• Tight tolerances (<math>\pm</math> 0.25 %)</li> <li>• Metal glaze on high-quality ceramic</li> <li>• Low TCR (<math>\pm</math> 50 ppm/K)</li> </ul>	Vishay
<a href="#">D/CRCW-P</a> 	<ul style="list-style-type: none"> <li>• <b>Lead (Pb)-Bearing Thick Film Semi-Precision Chip Resistors</b></li> <li>• Size: 0402 to 2512</li> <li>• Resistance range: 10 <math>\Omega</math> to 10 M<math>\Omega</math></li> <li>• Power ratings: 0.063 W to 1 W</li> </ul>	<ul style="list-style-type: none"> <li>• AEC-Q200 qualified</li> <li>• Tight tolerances (<math>\pm</math> 0.25 %)</li> <li>• Low TCR (<math>\pm</math> 50 ppm/K)</li> <li>• Metal glaze on high-quality ceramic</li> </ul>	Vishay
<a href="#">CRCW... EN802</a> 	<ul style="list-style-type: none"> <li>• <b>Thick Film Chip Resistors with CECC Approval</b></li> <li>• Size: 0805 / 1206</li> <li>• Resistance range: 1 <math>\Omega</math> to 1 M<math>\Omega</math></li> <li>• Power ratings: 0.125 W / 0.25 W</li> <li>• Zero ohm jumper: available for all sizes</li> </ul>	<ul style="list-style-type: none"> <li>• Compatible with lead (Pb)-free and lead (Pb)-bearing processes</li> <li>• IECQ - CECC approval to EN 140401-802</li> <li>• Available with established reliability, failure rate level E6 (cor. to MIL level P)</li> </ul>	Draloric
<a href="#">D.. EN802</a> 	<ul style="list-style-type: none"> <li>• <b>Lead (Pb)-Bearing Thick Film Chip Resistors with CECC Approval</b></li> <li>• Size: 0805 (D12) / 1206 (D25)</li> <li>• Resistance range: 1 <math>\Omega</math> to 1 M<math>\Omega</math></li> <li>• Power ratings: 0.125 W / 0.25 W</li> <li>• Zero ohm jumper: available for all sizes</li> </ul>	<ul style="list-style-type: none"> <li>• SnPb termination plating on Ni barrier, minimum 10% Pb</li> <li>• IECQ - CECC approval to EN 140401-802</li> <li>• Available with established reliability, failure rate level E6 (cor. to MIL level P)</li> </ul>	Draloric



# SMD RESISTORS

## Vishay Draloric / Beyschlag

Thick Film Chip Resistors			
Series	Description	Features	Brand
<b>CRCW-HP e3</b> 	<ul style="list-style-type: none"> <li>• <b>Pulse-Proof, High-Power Thick Film Chip Resistors</b></li> <li>• Size: 0402 to 2512</li> <li>• Resistance range: 1 <math>\Omega</math> to 1 M<math>\Omega</math></li> <li>• Power ratings: 0.125 W to 1.5 W</li> <li>• Tolerance: 0.5 %</li> </ul>	<ul style="list-style-type: none"> <li>• Excellent pulse load capability</li> <li>• Enhanced power rating</li> <li>• Double-sided printed resistor element</li> <li>• Protective overglaze</li> <li>• AEC-Q200 qualified, rev. C compliant</li> </ul>	Draloric
<b>RCL e3</b> 	<ul style="list-style-type: none"> <li>• <b>Long Side Termination Thick Film Chip Resistors</b></li> <li>• Size: 0406 to 1225</li> <li>• Resistance range: 1 <math>\Omega</math> to 2.2 M<math>\Omega</math></li> <li>• Power ratings: 0.25 W to 2 W</li> </ul>	<ul style="list-style-type: none"> <li>• Enhanced power rating</li> <li>• Long side terminations</li> <li>• Protective overglaze</li> <li>• AEC-Q200 qualified, rev. C compliant</li> <li>• Better performance in temperature cycles</li> </ul>	Draloric
<b>RCA-LS e3</b> 	<ul style="list-style-type: none"> <li>• <b>Sulfur-Resistant, Long Side Termination Thick Film Chip Resistors</b></li> <li>• Size: 0406 to 1225</li> <li>• Resistance range: 1 <math>\Omega</math> to 2.2 M<math>\Omega</math></li> <li>• Power ratings: 0.25 W to 2 W</li> </ul>	<ul style="list-style-type: none"> <li>• Excellent performance in sulfur environment</li> <li>• Better performance in temperature cycles</li> <li>• Enhanced power rating</li> <li>• Long side terminations</li> <li>• Protective overglaze</li> </ul>	Draloric
<b>RCV e3</b> 	<ul style="list-style-type: none"> <li>• <b>High-Voltage Thick Film Chip Resistors</b></li> <li>• Size: 0805 to 1206</li> <li>• Resistance range: 100 k<math>\Omega</math> to 10 M<math>\Omega</math></li> <li>• Power ratings: 0.125 W to 0.25 W</li> </ul>	<ul style="list-style-type: none"> <li>• High operating voltage, (up to 500 V)</li> <li>• Metal glaze on high-quality ceramic</li> </ul>	Draloric
<b>RCG e3</b> 	<ul style="list-style-type: none"> <li>• <b>Fully RoHS-Compliant, Green, Thick Film, Rectangular Chip Resistors</b></li> <li>• Size: 0402 to 1206</li> <li>• Resistance range: 1 <math>\Omega</math> to 10 M<math>\Omega</math></li> <li>• Power ratings: 0.063 W to 0.25 W</li> </ul>	<ul style="list-style-type: none"> <li>• Green resistor – does not use RoHS exemptions</li> <li>• Stability &lt; 1 % = 1 % for 1000 h at 70 °C</li> <li>• Metal glaze on high-quality ceramic</li> </ul>	Draloric
<b>D/CRCW-IF e3</b> 	<ul style="list-style-type: none"> <li>• <b>Thick Film, Rectangular, Pulse-Proof Chip Resistors</b></li> <li>• Size: 0402 to 2512</li> <li>• Resistance range: 1 <math>\Omega</math> to 100 k<math>\Omega</math></li> <li>• Power ratings: 0.063 W to 1.0 W</li> </ul>	<ul style="list-style-type: none"> <li>• AEC-Q200 qualified</li> <li>• High pulse performance</li> <li>• Metal glaze on high-quality ceramic</li> <li>• Protective overglaze</li> <li>• Lead (Pb)-free solder contacts on Ni barrier layer</li> </ul>	Vishay
<b>RCA-IF AT e3</b> 	<ul style="list-style-type: none"> <li>• <b>Sulfur-Resistant, Pulse-Proof Thick Film Chip Resistors</b></li> <li>• Size: 0402 to 2512</li> <li>• Resistance range: 1 <math>\Omega</math> to 100 k<math>\Omega</math></li> <li>• Power ratings: 0.063 W to 1.0 W</li> </ul>	<ul style="list-style-type: none"> <li>• AEC-Q200 qualified</li> <li>• Excellent performance in sulfur environment</li> <li>• High pulse performance</li> <li>• Metal glaze on high-quality ceramic</li> <li>• Protective overglaze</li> <li>• Lead (Pb)-free solder contacts on Ni barrier layer</li> </ul>	Draloric
<b>D AP, CRCW-AP</b> 	<ul style="list-style-type: none"> <li>• <b>Thick Film, Rectangular Chip Resistors for Conductive Gluing</b></li> <li>• Size: 0402 to 2512</li> <li>• Ohmic range: 3.6 <math>\Omega</math> to 10 M<math>\Omega</math></li> <li>• Power ratings: 0.063 W to 1 W</li> <li>• Zero ohm jumper: available for all sizes</li> </ul>	<ul style="list-style-type: none"> <li>• AgPd-terminations for conductive gluing</li> <li>• Stability &lt; 1 % = 1 % for 1000 h at 70 °C</li> <li>• Metal glaze on high-quality ceramic</li> </ul>	Draloric
<b>D/CRCW-HR e3</b> 	<ul style="list-style-type: none"> <li>• <b>Thick Film, Rectangular, High-Value Chip Resistors</b></li> <li>• Size: 0603 to 1206</li> <li>• Resistance range: 11 M<math>\Omega</math> to 470 M<math>\Omega</math></li> <li>• Power ratings: 0.1 W to 0.25 W</li> </ul>	<ul style="list-style-type: none"> <li>• High resistance values (up to 470M)</li> <li>• Suitable for voltage dividers and hybrids</li> <li>• Metal glaze on high-quality ceramic</li> <li>• Protective overglaze</li> </ul>	Vishay



# SMD RESISTORS



## Vishay Draloric / Beyschlag

Thick Film Chip Resistors			
Series	Description	Features	Brand
<a href="#">D/CRCW-HR</a> 	<ul style="list-style-type: none"> <li>• Lead (Pb)-bearing Thick Film, Rectangular High-Value Chip Resistor</li> <li>• Size: 0603 to 1206</li> <li>• Resistance range: 11 M<math>\Omega</math> to 470 M<math>\Omega</math></li> <li>• Power ratings: 0.1 W to 0.25 W</li> </ul>	<ul style="list-style-type: none"> <li>• High resistance values (up to 470M)</li> <li>• Suitable for voltage dividers and hybrids</li> <li>• SnPb termination plating on Ni barrier, minimum 10% Pb</li> <li>• Metal glaze on high-quality ceramic</li> <li>• Protective overglaze</li> </ul>	Vishay
<a href="#">D/CRCW-TR e3</a> 	<ul style="list-style-type: none"> <li>• Thick Film, Rectangular, Trimmable Chip Resistors</li> <li>• Size: 0402 to 2512</li> <li>• Resistance range: 0.47 <math>\Omega</math> to 10 M<math>\Omega</math></li> <li>• Power ratings: 0.063 W to 1.0 W</li> </ul>	<ul style="list-style-type: none"> <li>• Can be trimmed to the required value after insertion</li> <li>• For applications in precision circuitry where relative tolerances can be compensated by trimming</li> <li>• Metal glaze on high-quality ceramic</li> <li>• Protective overglaze</li> </ul>	Vishay
<a href="#">D/CRCW-TR</a> 	<ul style="list-style-type: none"> <li>• Lead (Pb)-Bearing Thick Film, Rectangular, Trimmable Chip Resistors</li> <li>• Size: 0402 to 2512</li> <li>• Resistance range: 0.47 <math>\Omega</math> to 10 M<math>\Omega</math></li> <li>• Power ratings: 0.063 W to 1.0 W</li> </ul>	<ul style="list-style-type: none"> <li>• Can be trimmed to the required value after insertion</li> <li>• For applications in precision circuitry where relative tolerances can be compensated by trimming</li> <li>• SnPb termination plating on Ni barrier, minimum 10% Pb</li> <li>• Metal glaze on high-quality ceramic</li> <li>• Protective overglaze</li> </ul>	Vishay
<a href="#">CRCW0201 e3</a> 	<ul style="list-style-type: none"> <li>• Commodity Thick Film Chip Resistors</li> <li>• Size: 0201</li> <li>• Resistance range: 1 <math>\Omega</math> to 10 M<math>\Omega</math></li> <li>• Power rating: 0.05 W</li> <li>• Tolerance: 0.5 %</li> </ul>	<ul style="list-style-type: none"> <li>• High-volume product suitable for commercial applications</li> <li>• Metal glaze on high-quality ceramic</li> </ul>	Vishay
<a href="#">CRCW01005 e3</a> 	<ul style="list-style-type: none"> <li>• Commodity Thick Film Chip Resistors</li> <li>• Size: 01005</li> <li>• Resistance range: 1 <math>\Omega</math> to 1 M<math>\Omega</math></li> <li>• Power rating: 0.031 W</li> <li>• Tolerance: 1 %</li> </ul>	<ul style="list-style-type: none"> <li>• High-volume product suitable for commercial applications</li> <li>• Metal glaze on high-quality ceramic</li> </ul>	Vishay
<a href="#">CRA04S</a> 	<ul style="list-style-type: none"> <li>• Thick Film Chip Resistor Array</li> <li>• Size: 0404 to 0408</li> <li>• Power rating: 0.063 W</li> <li>• Resistance range: 10 <math>\Omega</math> to 1 M<math>\Omega</math></li> </ul>	<ul style="list-style-type: none"> <li>• Convex terminal array with square corners</li> <li>• 4- or 8-terminal package with isolated resistors</li> </ul>	Vishay
<a href="#">CRA04P</a> 	<ul style="list-style-type: none"> <li>• Thick Film Chip Resistor Array</li> <li>• Size: 0408</li> <li>• Power rating: 0.063 W</li> <li>• Resistance range: 1 <math>\Omega</math> to 1 M<math>\Omega</math></li> </ul>	<ul style="list-style-type: none"> <li>• Concave terminal array with square corners</li> <li>• 8-terminal package with isolated resistors</li> </ul>	Vishay
<a href="#">CRA06E, CRA06S</a> 	<ul style="list-style-type: none"> <li>• Thick Film Chip Resistor Array</li> <li>• Size: 0606 to 0612</li> <li>• Power rating: 0.063 W</li> <li>• Resistance range: 10 <math>\Omega</math> to 1 M<math>\Omega</math></li> </ul>	<ul style="list-style-type: none"> <li>• Convex terminal array available with either scalloped corners (E version) or square corners (S version)</li> <li>• 4- or 8-terminal package with isolated resistors</li> </ul>	Vishay



# SMD RESISTORS

Vishay Draloric / Beyschlag

Thick Film Chip Resistors			
Series	Description	Features	Brand
<b>CRA06P</b> 	<ul style="list-style-type: none"> <li>• Thick Film Chip Resistor Array</li> <li>• Size: 0606 to 0612</li> <li>• Power rating: 0.063 W</li> <li>• Resistance range: 10 <math>\Omega</math> to 1 M<math>\Omega</math></li> </ul>	<ul style="list-style-type: none"> <li>• Concave terminal array with square corners</li> <li>• 4- or 8-terminal package with isolated resistors</li> </ul>	Vishay
<b>CRA12E, CRA12S</b> 	<ul style="list-style-type: none"> <li>• Thick Film Chip Resistor Array</li> <li>• Size: 1220 to 1225</li> <li>• Power ratings: 0.1 W to 0.125 W</li> <li>• Resistance range: 10 <math>\Omega</math> to 1 M<math>\Omega</math></li> </ul>	<ul style="list-style-type: none"> <li>• Convex terminal array available with either scalloped corners (E version) or square corners (S version)</li> <li>• Wide ohmic range: 10 <math>\Omega</math> to 1 M<math>\Omega</math></li> <li>• 8- or 10-terminal package with isolated resistors</li> </ul>	Vishay



# SMD RESISTORS

## Selector Guide

### Vishay Intertechnology – A Global Industry Leader

Vishay Intertechnology components are used in virtually all types of electronic devices and equipment, in the industrial, computing, automotive, consumer, telecommunications, military, aerospace, power supplies, and medical markets. Vishay has manufacturing plants in the Americas, Asia, Europe, and Israel, as well as sales offices worldwide. Vishay Intertechnology has a diverse portfolio of semiconductors and passive components, including diodes, MOSFETs (metal-oxide semiconductor field-effect transistors), optoelectronic products, selected integrated circuits (ICs), resistors, inductors, and capacitors. This enables it to provide “one-stop shop” service and offer many different parts for each customer design. Its innovations in technology, successful acquisition strategy, superior product quality, and “one-stop shop” service to customers have made the Company a global industry leader.

[www.vishay.com](http://www.vishay.com)

Two of the most important manufacturers of fixed film resistors are the Vishay Draloric and the Vishay Beyschlag brands.

#### About Draloric

In 1900, in Germany, Mr. Philip Rosenthal, as a sideline to his established business of porcelain tableware, started to manufacture ceramics for electronic applications. Starting in 1910, these were also made in Selb, Germany. In 1936, this electronic ceramics activity was separated from Rosenthal AG and made part of a joint venture with AEG named Rosenthal Isolatoren GmbH, or “RIG.”

The RIG name lasted until 1974, when AEG took over all of RIG and renamed it “CRL” because of its portfolio of passive components. The name was changed again in 1974 to Draloric Electronic GmbH. With the acquisition of Draloric Electronic GmbH by the electronics division of Corning Glass Works in 1981, the name was changed to Corning-Draloric, which lasted until its acquisition by Vishay Intertechnology in 1987.

Vishay Draloric is a leading brand for MELF resistors and ceramic capacitor products. The Vishay Draloric product portfolio also includes thin film flat chip resistors, leaded film and wirewound resistors, and large ceramic power capacitors. As part of Vishay Intertechnology, Draloric Electronic has had production sites in Israel since 1989, and in the Czech Republic since 1991.

Draloric competitors Roederstein GmbH (resistors and capacitors), and Vitramon GmbH (capacitors only) were acquired by Vishay Intertechnology in 1993 and 1994, respectively, and merged with Draloric Electronic GmbH, which has its headquarters in Selb. Since then, the name Vishay Draloric has been used as a brand name for resistor products.

Visit us at:

<http://www.vishay.com/company/brands/draloric>

#### About Beyschlag

A look back into the history of the company shows a solid business based on natural growth. From the moment the company was founded in 1931, the customer has always come first. At the time, Dr. Bernhard Beyschlag started producing rectifiers in Berlin, Germany, to meet the growing needs of the new radio industry. Soon, carbon film resistors were in production. The company spent periods in Hitzacker and Westerland on the Island of Sylt before finally relocating to Heide in 1974. From the early 1970s, Beyschlag belonged to Philips Components, until 1999, when Philips divested itself of its passive components business to allow the foundation of BCcomponents. In 2002, BCcomponents was bought by Vishay.

For more than 80 years, Beyschlag has stood for expertise in thin film technology, continuous innovation, excellence in service and logistics, and customer-oriented solutions.

Visit us at:

<http://www.vishay.com/company/brands/beyschlag>